

72000

Standard Cycle Harsh Process Gate Valves

Table of Contents

Introduction	Page	94
Specifications	Page	95
Model Key Guide	Page	96
2.0" ID (DN50mm)	Page	97
2.5" ID (DN63mm)	Page	98
3.0" ID (DN75mm)	Page	99
4.0" ID (DN100mm)	Page	100
6.0" ID (DN150mm)	Page	101
8.0" ID (DN200mm)	Page	102

72000

Introduction



Model Number 72210-0300R
3" ID (DN75) Pneumatic CF-F

Product Features

- Extreme durability for the most demanding processes
- Robust dual containment design and low particles
- 100,000 cycles
- HV with vacuum brazed plate body
- Sizes from 2" ID (DN50) to 8" ID (DN200)
- Manual and pneumatic actuation
- Stainless steel welded bellows outside of process
- Standard KF, ISO, CF, ANSI, JIS or custom flange options
- High temperature options up to 250°C
- Easily customizable to work with almost any application
- Designed, manufactured and assembled in the USA

72000

Description

The 72000 Series Gate Valves feature a simple dual containment design at the gate which seals on both sides. There are very few moving parts so the valves also have low particle generation. With virtually no moving parts in the gate mechanism the movement is not affected by dirty processes that would normally interfere with a standard mechanical gate. The bellows is outside of process and is protected by a wiper ring. The body and all major internal components are vacuum furnace brazed at 1100°C, at 1×10^{-6} mbar, ensuring maximum joint integrity. This eliminates the possibility of virtual leaks or entrapment areas and minimizes body distortion found in conventionally welded valves. For maintenance purposes, the carriage assembly can easily be removed from the body without removing the valve from the system.

Applications

KF Flanges, ISO Bolted and Clamped Flanges, ANSI and optional JIS Models are designed for high vacuum applications specifically when pressure ranges approximate 1×10^{-9} mbar and bakeout temperatures do not exceed 250°C. These valves provide valving for anything needing vacuum in a dirty or harsh environment. They can be customized to work with almost any application.

Internally Heated and Water-Cooled

These valves can easily be fitted with heaters to internally heat a process from the inside up to 250°C. See custom internally heated valve section on page 187. They can also be used to cool process internally via the gate and the flanges.



72000 Series Standard Cycle Harsh Process Gate Valves

Specifications

Standard Specifications

Materials

Valve body and mechanism	304 stainless steel
Welded bellows shaft seal	AM-350
Bonnet / gate seals	
HV	Viton® elastomer

Vacuum

Pressure range	
HV	1×10^{-9} mbar
Leak rate	$< 2 \times 10^{-9}$ mbar l/s
Differential pressure	2 bar in either direction
Maximum Δ pressure before opening	≤ 1 bar

Temperature


	without solenoid
Elastomer sealed bonnet	150°C
Actuator	
Manual	60°C
Pneumatic	60°C

Mechanism

Air service	80 psig (5.5 bar)
Solenoid	4.0 Watts
supplied voltage	120 VAC 50/60 Hz
optional voltage	24, 200, 240 VAC 50/60 Hz or 12, 24 VDC
Position indicator, max.	115 VAC or 28 VDC, 20 mA

Cycles Until Service

	100,000
(Application dependent)	

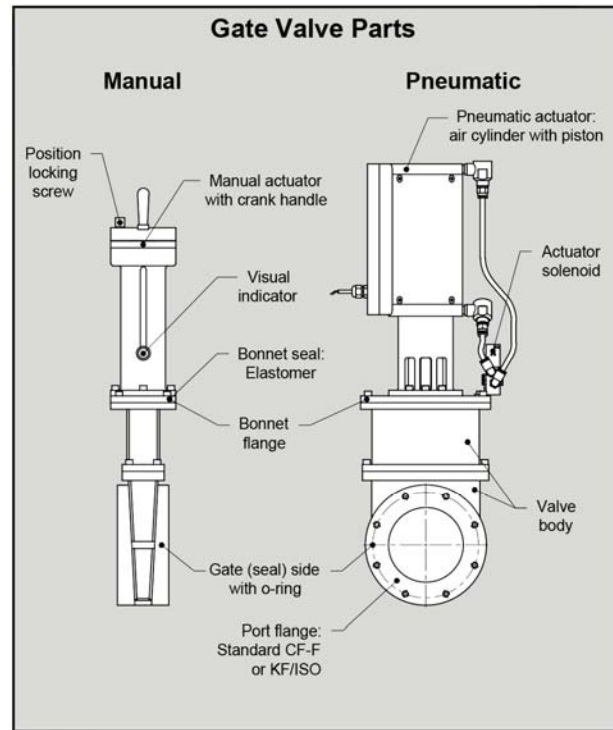

Notes

- Dimensions given in U.S. System and [metric]
- Conductance ratings based on air, given in liters per second
- Due to ongoing product development, prices, dimensions and specifications are subject to change without notice

Options

All 72000 Series Valves may be equipped with alternative flanges, solenoids and seals. Contact HVA to discuss your requirements.


- Alternate voltage controls
- JIS configurations
- Custom flange sizes
- Gauge ports, roughing ports and purge ports
- Microswitches for position indicators
- High temperature components, including O-rings, microswitches and actuator
- Custom materials, such as Inconel® or Kalrez®
- Internally heated up to 250°C
- Water cooled gate and flanges
- Special solenoid or position indicator connectors

72000



Example: 72212-0404R = 72000 Series gate valve, pneumatic actuator, Viton gate & bonnet seals, 120VAC solenoid, 4" ID CF (6" OD) flanges with Metric thread, reed switch position indicator

72000

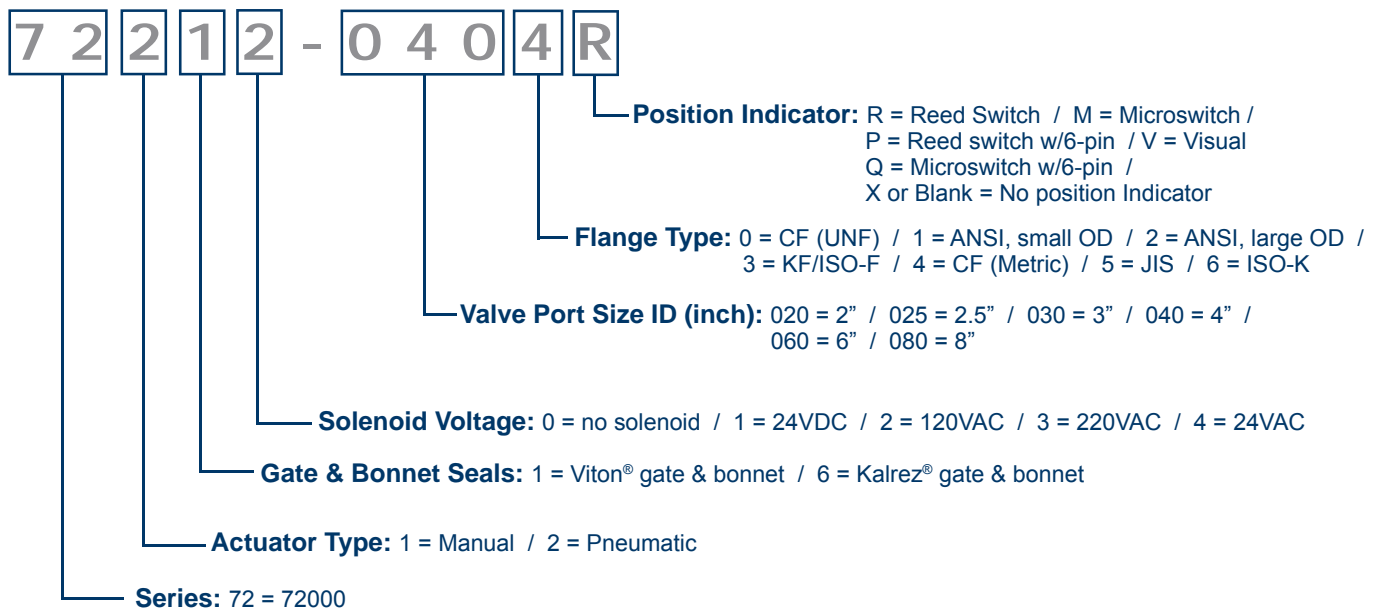

Note


- A suffix of -001 to -999 at the end of or a '9' or 'S' within a Model Number indicates a valve with custom configuration.
- If a roughing/gauge/purge port is needed add the following after the position indicator:

- A = KF 25
- B = KF 40
- C = 1.33" OD CF fixed with thru holes
- D = 2.75" OD CF fixed with thru holes
- S = special/custom or other



72000 Series Standard Cycle Harsh Process Gate Valves

50-mm 2.0-inch

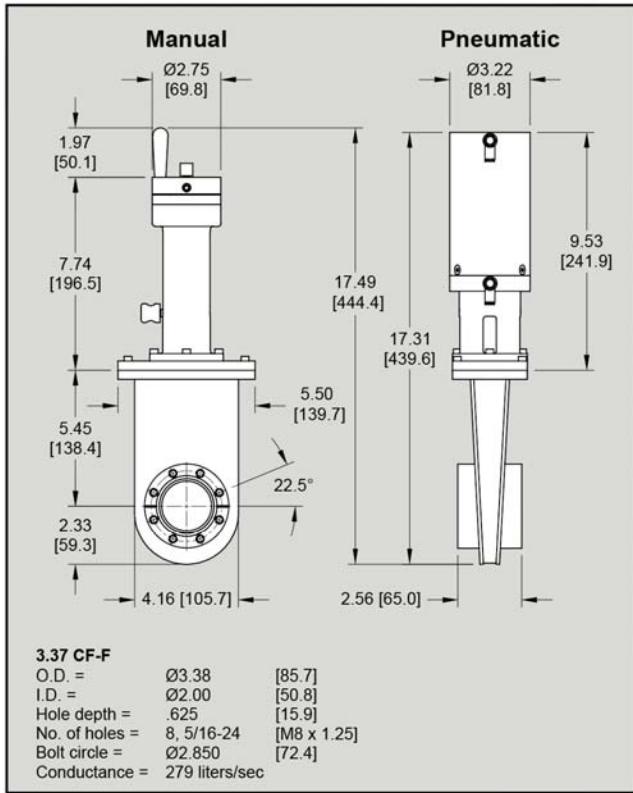

CF-F 3.37 Flanges			50-mm 2.0-inch
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number *
Manual			
Viton-Viton (HV)	U.S. Bolt	19 [8]	72110-0200V
Pneumatic			
Viton-Viton (HV)	U.S. Bolt	21 [9]	72212-0200R

* For metric flanges, replace last 0 in model number with 4

Specifications

HV Pressure Range:

Helium Leak Rate: Materials:

Maximum Δ Pressure Before Opening:

Materials:

- Body = 304 Stainless Steel
- Gate = 304 Stainless Steel
- Bellows = AM-350
- Actuator = 6061-T6 Aluminum


Operating Temperature:

- Body, Gate Open (Viton®) = 150°C*
- Body, Gate Closed (Viton®) = 150°C*
- Actuator w/out solenoid (Viton®) = 60°C*
- Position Indicator (Viton®) = 150°C*

1 x 10⁻⁹ mbar
 < 2 x 10⁻⁹ mbar l/s
 ≤ 1 bar

*250°C options available on request.

72000

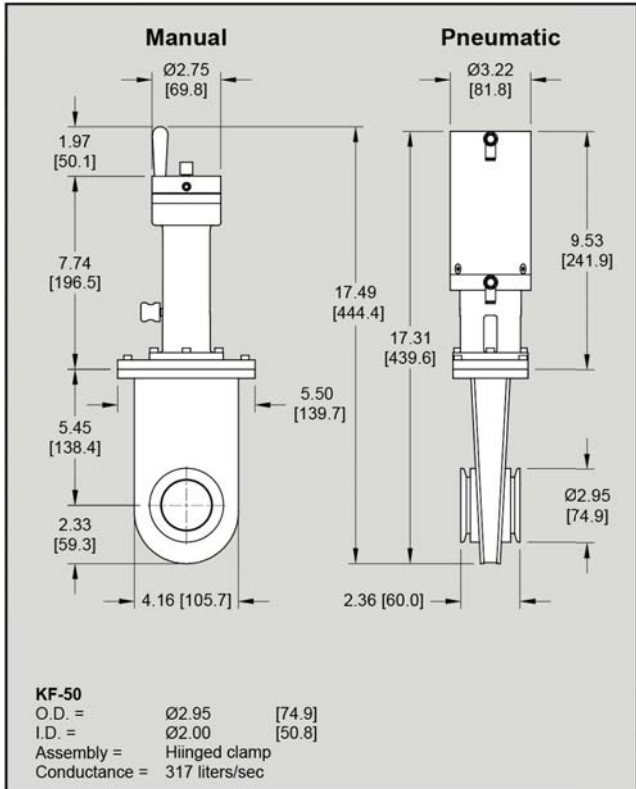


KF-50 Flanges			50-mm 2.0-inch
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number
Manual			
Viton-Viton (HV)	Metric Bolt	18 [8]	72110-0203V
Pneumatic			
Viton-Viton (HV)	Metric Bolt	20 [9]	72212-0203R

72000 Series Standard Cycle Harsh Process Gate Valves

63-mm 2.5-inch



72000

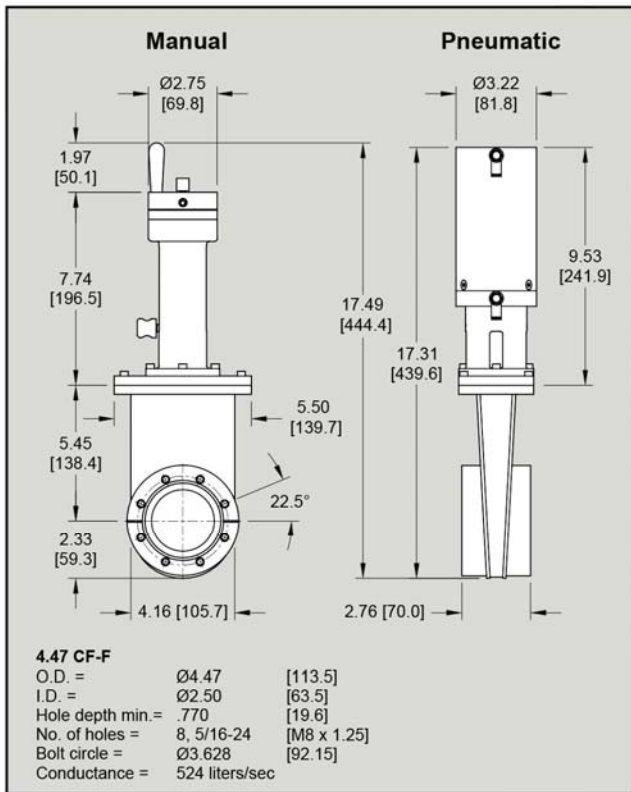

CF-F 4.47 Flanges			63-mm 2.5-inch
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number *
Manual			
Viton-Viton (HV)	U.S. Bolt	22 [10]	72110-0250V
Pneumatic			
Viton-Viton (HV)	U.S. Bolt	23 [10]	72212-0250R

* For metric flanges, replace last 0 in model number with 4

Specifications

HV Pressure Range:

Helium Leak Rate: Materials:

Maximum Δ Pressure Before Opening:

Materials:


Body = 304 Stainless Steel
 Gate = 304 Stainless Steel
 Bellows = AM-350
 Actuator = 6061-T6 Aluminum

Operating Temperature:


Body, Gate Open (Viton®) = 150°C*
 Body, Gate Closed (Viton®) = 150°C*
 Actuator w/out solenoid (Viton®) = 60°C*
 Position Indicator (Viton®) = 150°C*

*250°C options available on request.

1 x 10⁻⁹ mbar
 < 2 x 10⁻⁹ mbar l/s
 ≤ 1 bar

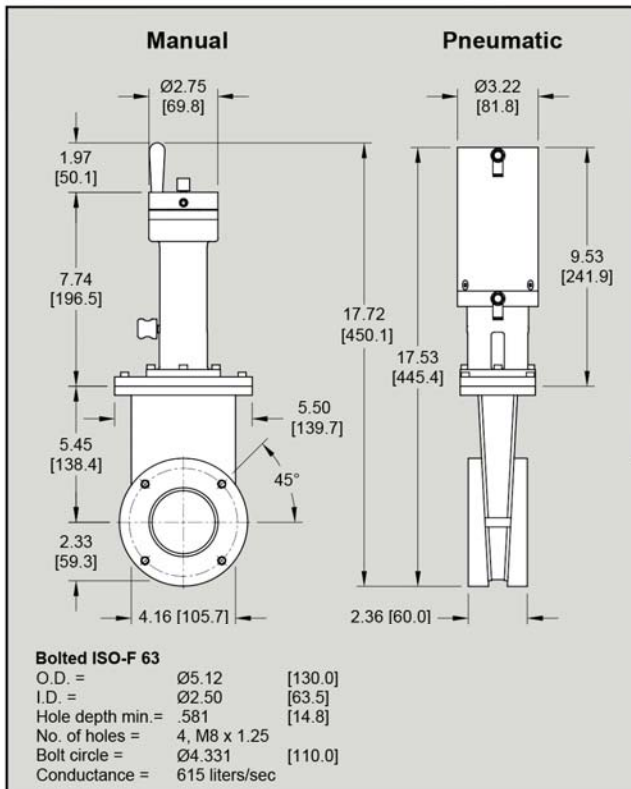

ISO-63 Flanges			63-mm 2.5-inch
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number
Manual			
Viton-Viton (HV)	Metric Bolt	23 [10]	72110-0253V
Viton-Viton (HV)	Clamp	23 [10]	72110-0256V
Pneumatic			
Viton-Viton (HV)	Metric Bolt	24 [11]	72212-0253R
Viton-Viton (HV)	Clamp	24 [11]	72212-0256R




Clamped ISO-K 63

O.D. = Ø3.74 [95.0]
 I.D. = Ø2.50 [63.5]
 Thickness = .472 [12.0]
 No. of clamps = 3-4
 Conductance = 363 liters/sec



72000 Series Standard Cycle Harsh Process Gate Valves

75-mm 3.0-inch

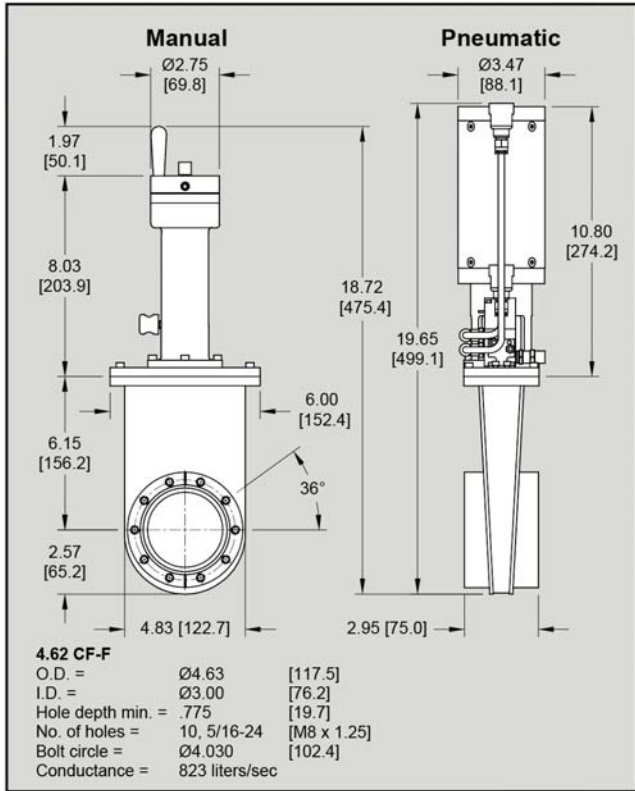

CF-F 4.62 Flanges		75-mm 3.0-inch	
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number *
Manual			
Viton-Viton (HV)	U.S. Bolt	22 [10]	72110-0300V
Pneumatic			
Viton-Viton (HV)	U.S. Bolt	26 [12]	72212-0300R

* For metric flanges, replace last 0 in model number with 4

Specifications

HV Pressure Range:

1×10^{-9} mbar

Helium Leak Rate: Materials:

$< 2 \times 10^{-9}$ mbar l/s

Maximum Δ Pressure Before Opening:

≤ 1 bar

Materials:


- Body = 304 Stainless Steel
- Gate = 304 Stainless Steel
- Bellows = AM-350
- Actuator = 6061-T6 Aluminum

Operating Temperature:


- Body, Gate Open (Viton®) = 150°C*
- Body, Gate Closed (Viton®) = 150°C*
- Actuator w/out solenoid (Viton®) = 60°C*
- Position Indicator (Viton®) = 150°C*

*250°C options available on request.

72000

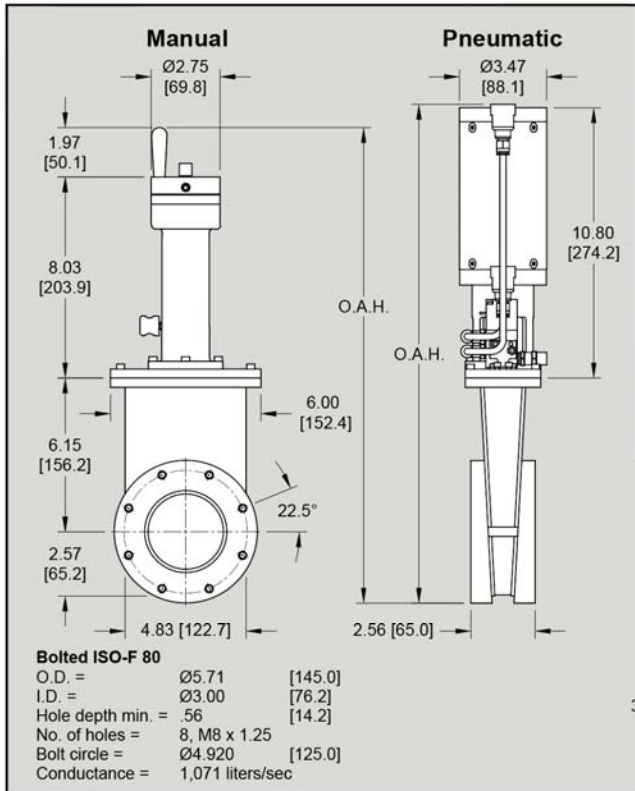

ISO-80 Flanges		75-mm 3.0-inch	
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number
Manual			
Viton-Viton (HV)	Metric Bolt	25 [11]	72110-0303V
Viton-Viton (HV)	Clamp	25 [11]	72110-0306V
Pneumatic			
Viton-Viton (HV)	Metric Bolt	29 [13]	72212-0303R
Viton-Viton (HV)	Clamp	29 [13]	72212-0306R

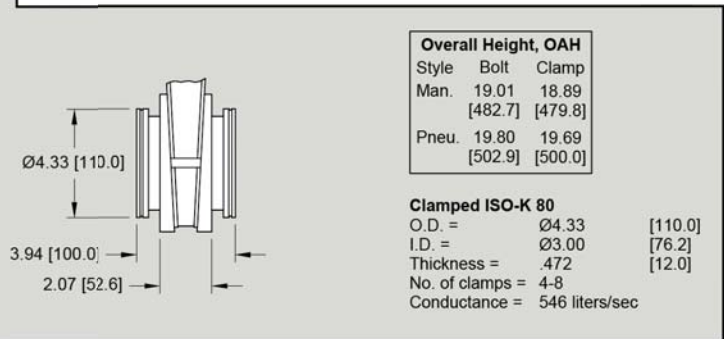


72000 Series Standard Cycle Harsh Process Gate Valves

100-mm 4.0-inch



72000

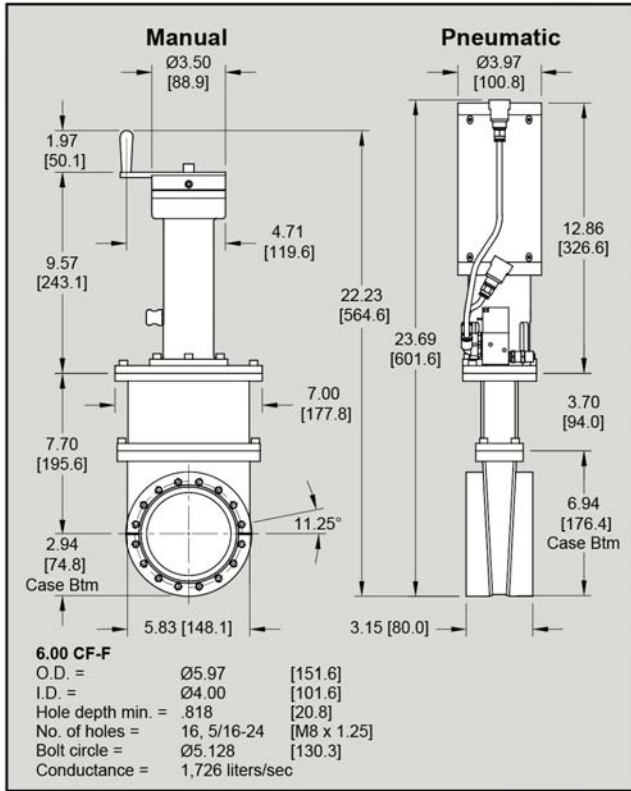

CF-F 6.00 Flanges		100-mm 4.0-inch	
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number *
Manual			
Viton-Viton (HV)	U.S. Bolt	35 [16]	72110-0400V
Pneumatic			
Viton-Viton (HV)	U.S. Bolt	39 [18]	72212-0400R

* For metric flanges, replace last 0 in model number with 4

Specifications

HV Pressure Range:

1 x 10⁻⁹ mbar

Helium Leak Rate: Materials:

< 2 x 10⁻⁹ mbar l/s

Maximum Δ Pressure Before Opening:

≤ 1 bar


Materials:

- Body = 304 Stainless Steel
- Gate = 304 Stainless Steel
- Bellows = AM-350
- Actuator = 6061-T6 Aluminum


Operating Temperature:

- Body, Gate Open (Viton®) = 150°C*
- Body, Gate Closed (Viton®) = 150°C*
- Actuator w/out solenoid (Viton®) = 60°C*
- Position Indicator (Viton®) = 150°C*

*250°C options available on request.

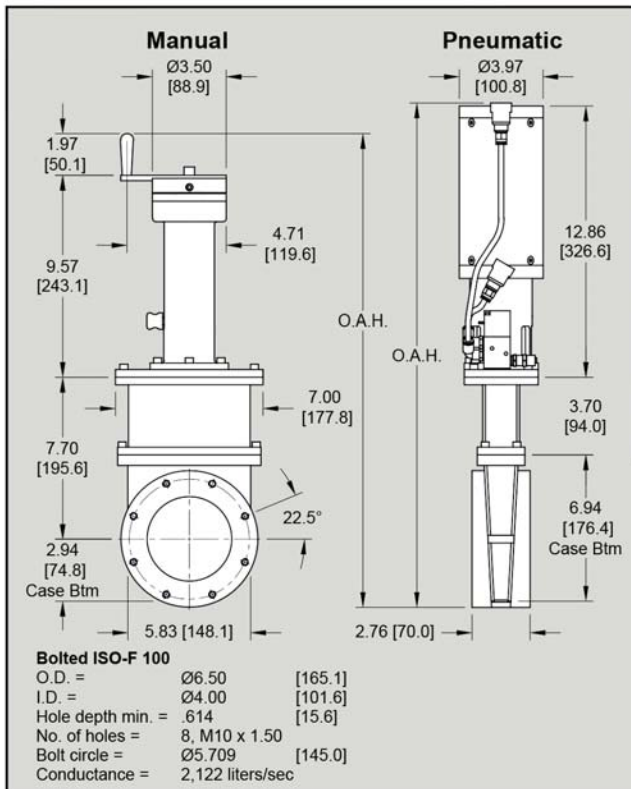


ISO-100 Flanges		100-mm 4.0-inch	
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number
Manual			
Viton-Viton (HV)	Metric Bolt	36 [16]	72110-0403V
Viton-Viton (HV)	Clamp	38 [17]	72110-0406V
Pneumatic			
Viton-Viton (HV)	Metric Bolt	40 [18]	72212-0403R
Viton-Viton (HV)	Clamp	42 [19]	72212-0406R

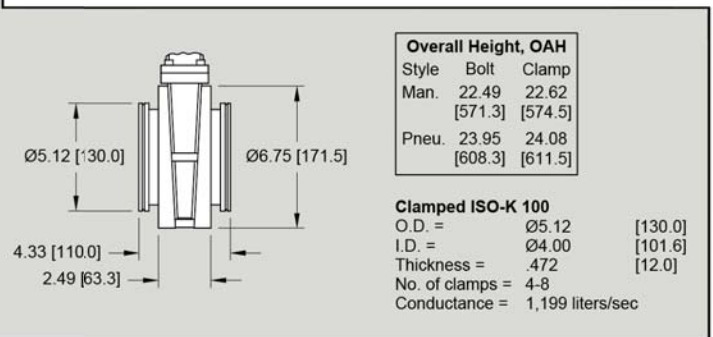



72000 Series Standard Cycle Harsh Process Gate Valves

150-mm 6.0-inch

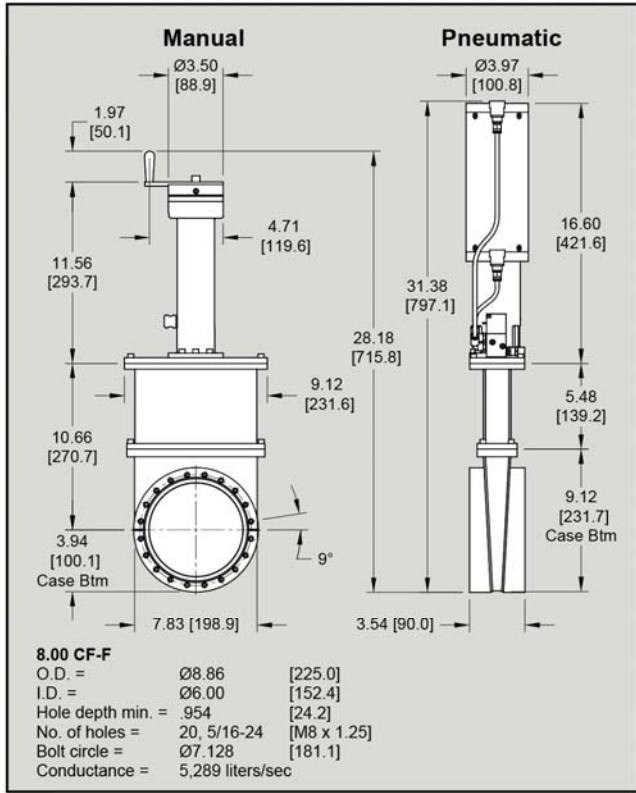

CF-F 8.00 Flanges			150-mm 6.0-inch
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number *
Manual			
Viton-Viton (HV)	U.S. Bolt	45 [20]	72110-0600V
Pneumatic			
Viton-Viton (HV)	U.S. Bolt	81 [37]	72212-0600R

* For metric flanges, replace last 0 in model number with 4

Specifications

HV Pressure Range:

1 x 10⁻⁹ mbar

Helium Leak Rate: Materials:

< 2 x 10⁻⁹ mbar l/s

Maximum Δ Pressure Before Opening:

≤ 1 bar

Materials:


Body = 304 Stainless Steel
Gate = 304 Stainless Steel
Bellows = AM-350
Actuator = 6061-T6 Aluminum

Operating Temperature:


Body, Gate Open (Viton®) = 150°C*
Body, Gate Closed (Viton®) = 150°C*
Actuator w/out solenoid (Viton®) = 60°C*
Position Indicator (Viton®) = 150°C*

*250°C options available on request.

72000

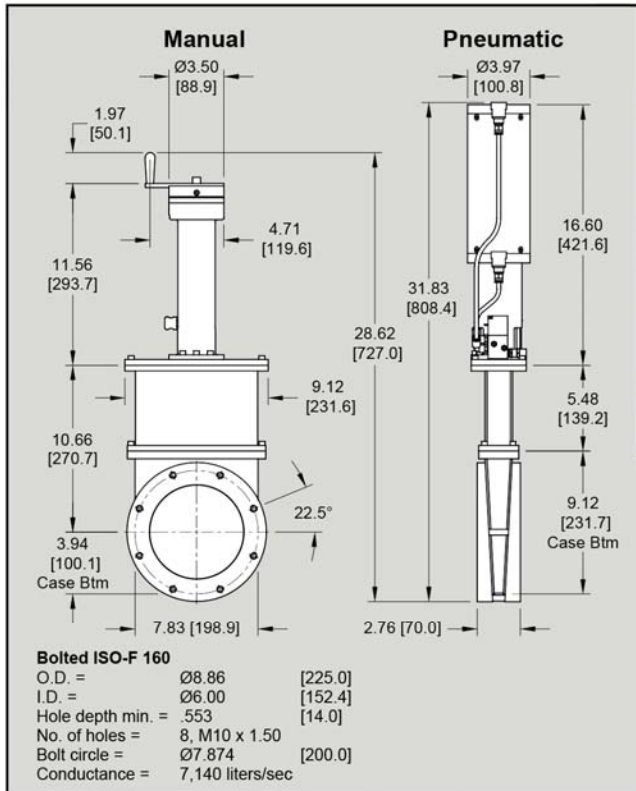

ISO-160 Flanges			150-mm 6.0-inch
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number
Manual			
Viton-Viton (HV)	Metric Bolt	46 [21]	72110-0603V
Viton-Viton (HV)	Clamp	50 [23]	72110-0606V
Pneumatic			
Viton-Viton (HV)	Metric Bolt	82 [37]	72212-0603R
Viton-Viton (HV)	Clamp	85 [39]	72212-0606R

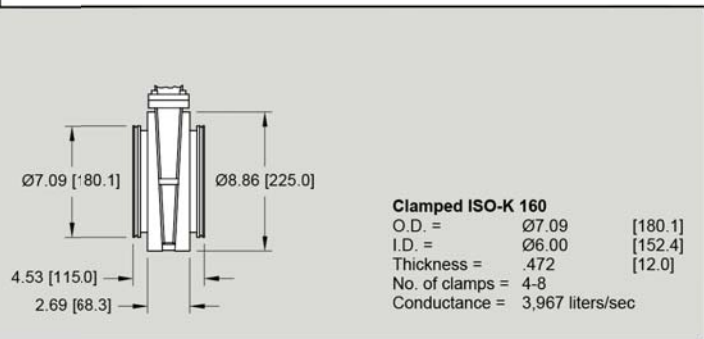


72000 Series Standard Cycle Harsh Process Gate Valves

200-mm 8.0-inch



72000

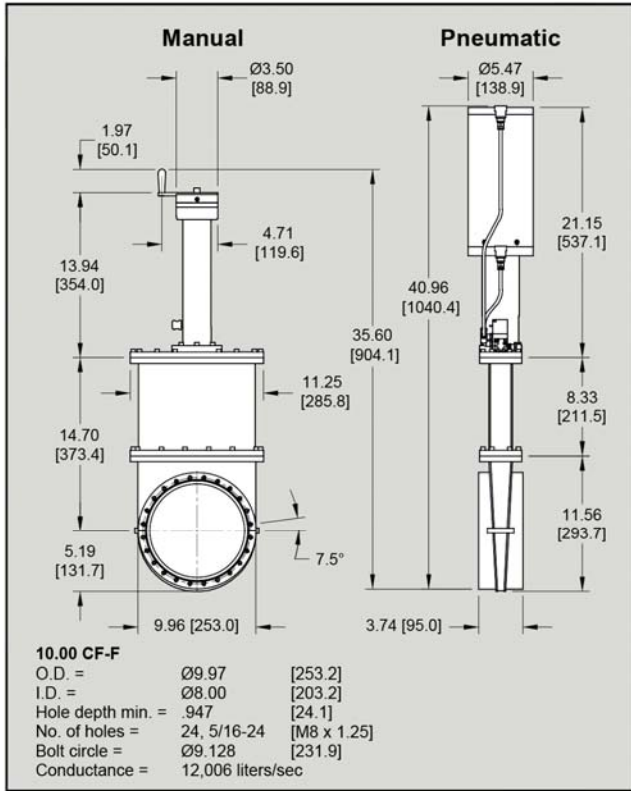

CF-F 10.00 Flanges		200-mm 8.0-inch	
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number *
Manual			
Viton-Viton (HV)	U.S. Bolt	95 [43]	72110-0800V
Pneumatic			
Viton-Viton (HV)	U.S. Bolt	111 [50]	72212-0800R

* For metric flanges, replace last 0 in model number with 4

Specifications

HV Pressure Range:

Helium Leak Rate: Materials:

Maximum Δ Pressure Before Opening:

Materials:


- Body = 304 Stainless Steel
- Gate = 304 Stainless Steel
- Bellows = AM-350
- Actuator = 6061-T6 Aluminum

Operating Temperature:

- Body, Gate Open (Viton®) = 150°C*
- Body, Gate Closed (Viton®) = 150°C*
- Actuator w/out solenoid (Viton®) = 60°C*
- Position Indicator (Viton®) = 150°C*

*250°C options available on request.

1×10^{-9} mbar
 $< 2 \times 10^{-9}$ mbar l/s
 ≤ 1 bar

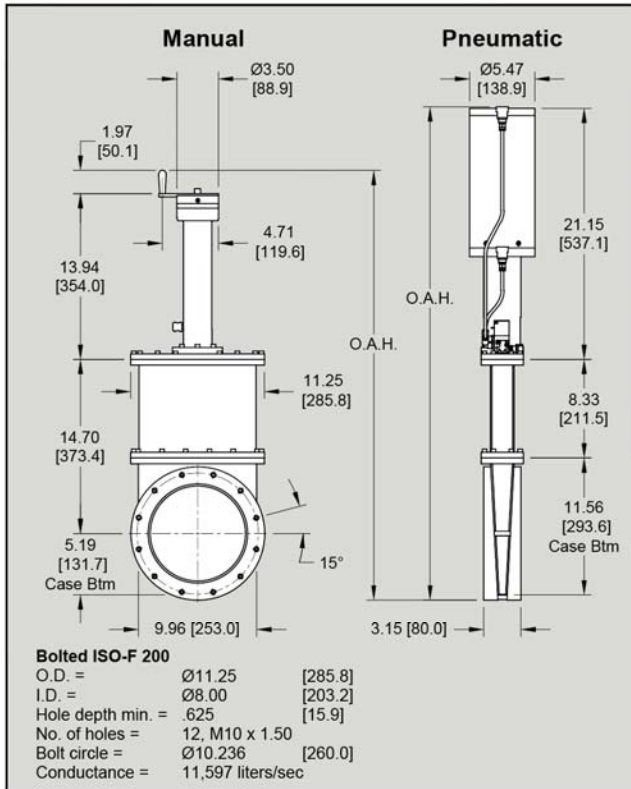

ISO-200 Flanges		200-mm 8.0-inch	
Bonnet-Gate	Flange Type	Ship Wt. lbs [Kg]	Model Number
Manual			
Viton-Viton (HV)	Metric Bolt	101 [45]	72110-0803V
Viton-Viton (HV)	Clamp	105 [48]	72110-0806V
Pneumatic			
Viton-Viton (HV)	Metric Bolt	118 [54]	72212-0803R
Viton-Viton (HV)	Clamp	121 [55]	72212-0806R

Overall Height, OAH

Style	Bolt	Clamp
Man.	36.24 [920.4]	36.11 [917.2]
Pneu.	41.60 [1056.6]	41.48 [1053.5]

Clamped ISO-K 200

O.D. =	$\text{Ø}9.45$	[240.0]
I.D. =	$\text{Ø}8.00$	[203.2]
Thickness =	.472	[12.0]
No. of clamps =	6-12	
Conductance =	9,449	liters/sec

